



Miles Architectural Ironmongery Ltd


SALES HELPLINE 0117 9639 630

R8 Comfort Sliding Door System

The R8 Comfort is an exposed aluminium sliding door system. Wall mounting attachment screws are hidden invisibly behind magnet held decorative covers. The doors are minimalistically held by rolling leaf holders. The sliding door is guided on the floor in a short, mounted floor guide that has a felt insert for reducing noise.

Tested in accordance with DIN EN 1527:1998

What makes this kit so great? No pre drilling of glass is required.. The glass is all held by clamps!!

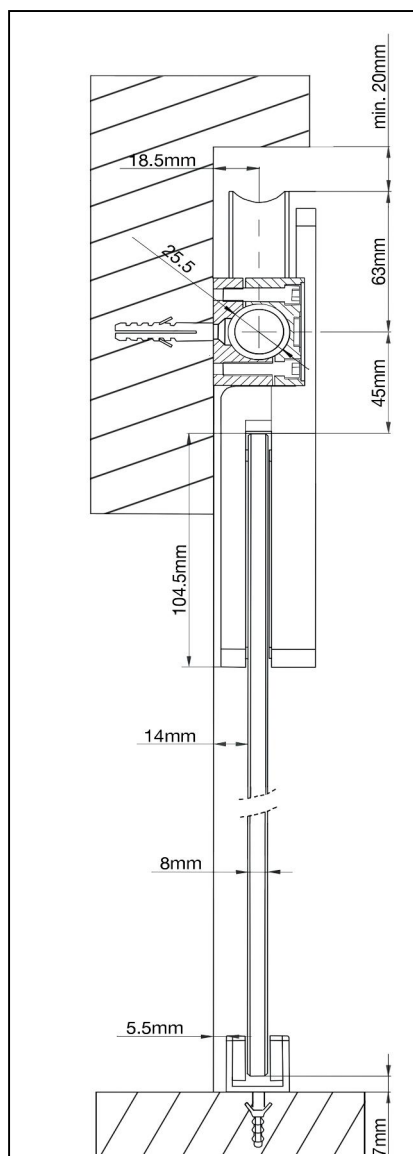

Rail Type	Tubular
Wall Mounted	"
Ceiling Mounted	"
Height Adjustable	"
Max Door Weight	60 kg
Min Door Width	850 mm
Suitable for 8mm Glass	"
Suitable for 10mm Glass	"
Suitable for Wooden Doors	"
Min Wooden Door Thickness	N/A
Max Wooden Door Thickness	N/A
Finish	SSO
Rail Dimensions (WxH)	25.5 Ø mm
1 Leaf Option	"
2 Leaf Option	"
Soft Close	"
Standard Length	2000 mm
Optional Length (special order)	"
DIN EN 1527	100,000 cycles
Wall Distance (door-wall) Glass:	14 mm
Optional Skirting/Architrave Spacer Kit	5, 10 & 15 mm



Miles Architectural Ironmongery Ltd, Unit 4 Duckmoor Road Industrial Estate, Bristol, BS3 2BJ

Tel: 0117 963 9630 Fax: 0117 963 9939 Email: sales@milesironmongery.co.uk

We reserve the right to change any of the specifications in this publication without notice.